

Applications & Features

- Long-life
- · Exceptional stability
- · Combustion efficiency analysis
- Lead-free oxygen sensor designed for all safety applications





Specifications

Performance Characteristics	
Sensor Type	Amperometric sensor (Lead-free oxygen sensor)
Measurement Range	0~25% Oxygen
Maximum Overload	30% Oxygen
Output Signal	130±30 μA in air
Response Time (T90)	< 15 sec for 90% response
Zero Current (offset)	< 0.5% vol O ₂
Linearity	Linear
Recommended Load Resistor	10 ohms
Bias Voltage	-600 mV
Environmental Environmental	
Temperature Range Continuous	-20°C to +50°C
Pressure Range	800 to 1200 mbar
Operating Humidity Range	15% to 90% RH
Lifetime	
Long Term Output Drift	< 5% over operating life
Recommended Storage Temp	0°C to 20°C
Expected Operating Life	> 60 months in air
Standard Warranty	36 months from date of dispatch
Intrinsic Safety Data	
Maximum Current in Normal Operation (pure O ₂)	0.01 A
Maximum o/c Voltage (10 to 100% O ₂)	0.9 V
Maximum s/c Current (10 to 100% O ₂)	0.5 A

Dimension









Due to ongoing research and product improvement, specifications are subject to change without notice.

Temperature Effects

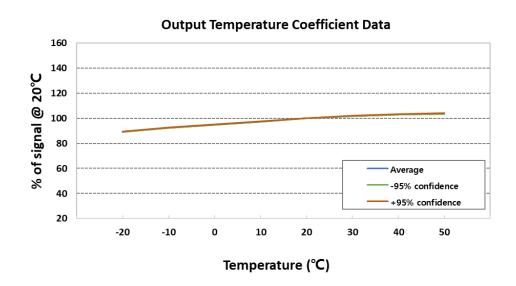

Standard Operating Circuit

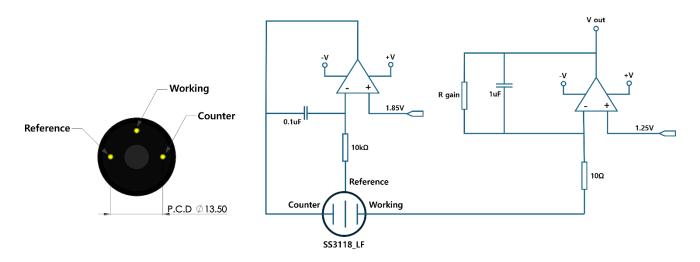

Due to ongoing research and product improvement, specifications are subject to change without notice.