


# Ethylene Oxide Gas Sensor

Product Data Sheet  
Model #SS21ETO

2023. Ver 1.0

## Applications


- Ideal for fixed instruments
- Industrial safety for chemical production
- Sterilization process



## Specifications


Performance Characteristics	
Output Signal	270±70 nA /ppm
Typical Baseline Range (pure air)	≤ ±0.5 ppm C <sub>2</sub> H <sub>4</sub> O equivalent
T90 Response Time	<200 seconds
Measurement Range	0-20 ppm
Maximum Overload	100 ppm
Linearity	Linear
Repeatability	≤ ±5% of signal
Recommended Load Resistor	10 ohms
Resolution (Electronics Dependent)	≤ 0.5 ppm typical
Bias Voltage	+300mV
Environmental	
Temperature Range Continuous	-20°C to +50°C
Pressure Range	800 to 1200 mbar
Operating Humidity Range	15% to 90% Rh
Life Time	
Long Term Output Drift	≤ 2% per month
Recommended Storage Temp	0°C to 20°C
Expected Operating Life	≥ 24 months in air
Standard Warranty	24 months from date of dispatch
Intrinsic Safety Data	
Maximum at 100ppm	0.1mA
Maximum o/c Voltage	<1.0V
Maximum s/c Current	<0.1A

## Dimension

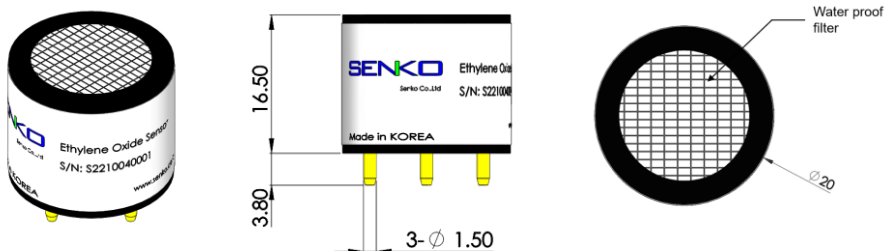

Due to ongoing research and product improvement, specifications are subject to change without notice


## Temperature effects

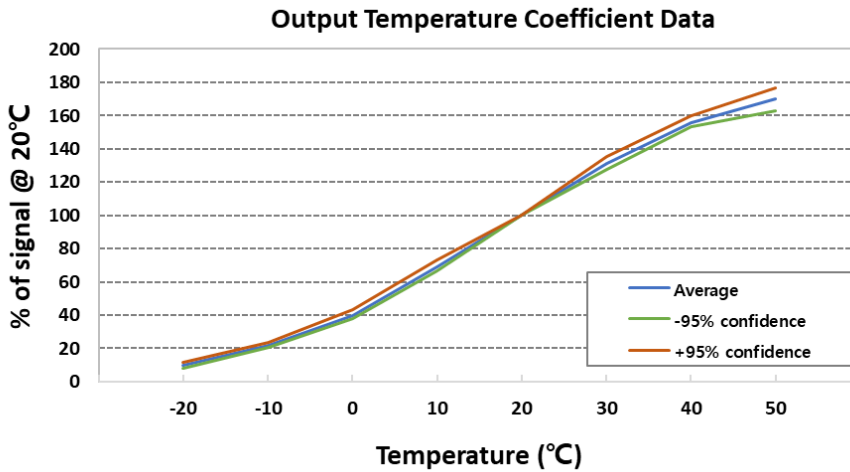

## Cross sensitivity

Gas	Concentration [ppm]	Reading [ppm]
Ethylene Oxide	5	5
Carbon Monoxide	100	50
Hydrogen	500	<2
Ammonia	100	0
Ethanol	207	140
Vinyl Chloride	10	8
Toluene	5	0.2

## Standard operating circuit

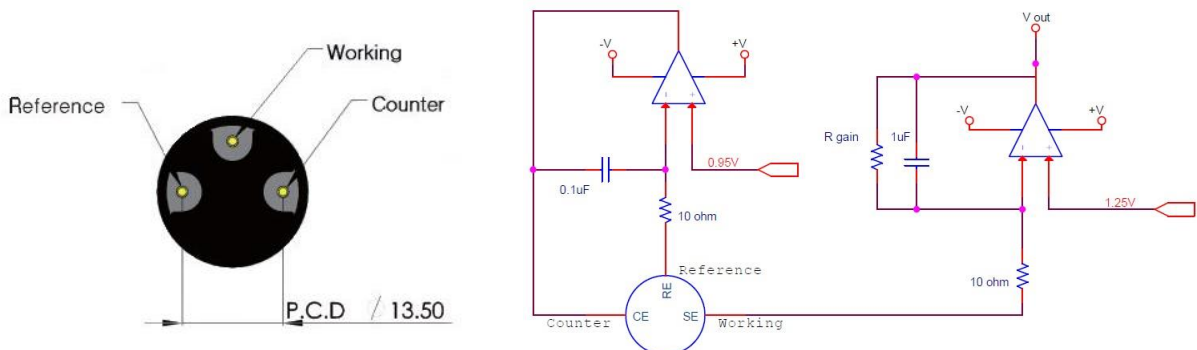

Due to ongoing research and product improvement, specifications are subject to change without notice