

Alcohol Gas Sensor

Product Data Sheet
Model #SS21A8

2025. Ver 1.0

Applications




- Ideal for portable instrument
- Alcohol detector applications
- Etc.



Specifications

Performance Characteristics	
Output Signal	Depends on sample volume
Measurement Range	0~0.4% BAC
Maximum Overload	0.6% BAC
Response Time (Clear to 5% of peak)	~ 10 seconds
Linearity	Linear
Repeatability	≤ ±3%
Recommended Load Resistor	10 ohms
Resolution (Electronics Dependent)	≤0.001% BAC
Environmental	
Temperature Range Continuous	-20°C to +50°C
Operating Humidity Range	15% to 90% Rh
Lifetime	
Long Term Output Drift	≤5% per annum
Recommended Storage Temp	0°C to 20°C
Expected Operating Life	≥ 24 months in air
Standard Warranty	24 months from date of dispatch

Dimension



Due to ongoing research and product improvement, specifications are subject to change without notice

Alcohol Gas Sensor


Product Data Sheet
Model #SS21A8

2025. Ver 1.0


Cross-sensitivity

Gas	Concentration [ppm]	Reading [ppm]
Ethanol	200	200
Ammonia	200	0
Hydrogen Sulfide	100	0
Acetaldehyde	200	<30
Toluene	200	<25
Carbon monoxide	500	0

Standard operating circuit

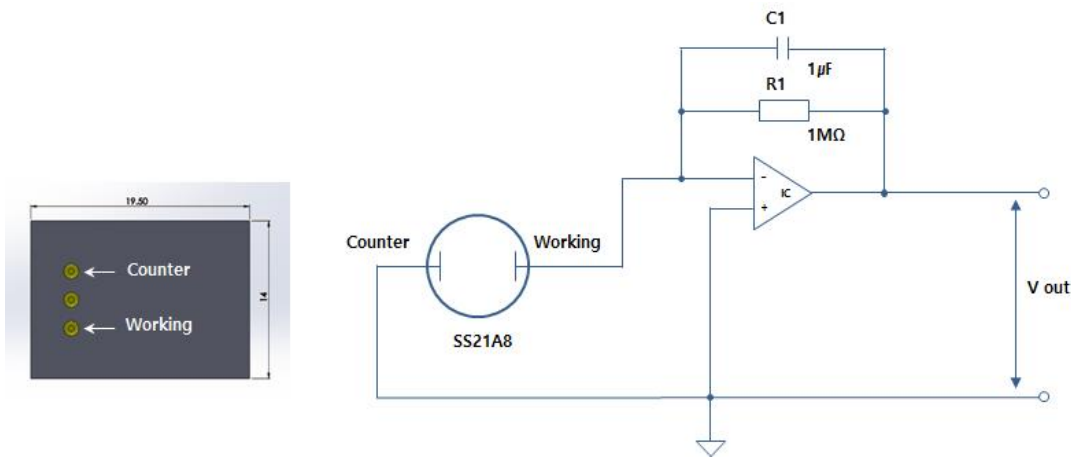

Typical Output

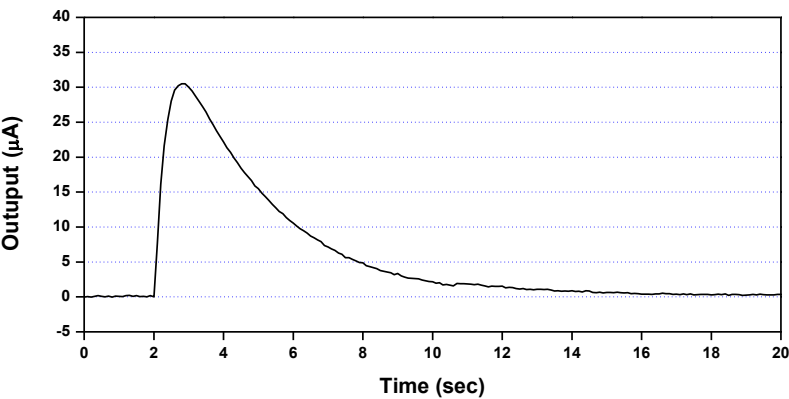

Due to ongoing research and product improvement, specifications are subject to change without notice